

High-power Short-time Overcurrent Simulator **ICG 3000.2**



- ANSI C12.02
- GB/T 17215.301
- GB/T 17215.322

Features

- > Emergency protection button
- > LCD display with current measurement and acquisition system
- > Built-in high-power voltage regulator with intelligent CPU control
- > High-power IGBT semiconductor switch, safe and reliable

Introduction

The ICG 3600.2 High-Power Short-Time Overcurrent Simulator is a test instrument designed in accordance with ANSI C12.02-2001. It is suitable for evaluating the immunity of electricity meters against high-current disturbances at 50 Hz/60 Hz power frequency.

Application Areas



Technical Parameters

Input Voltage	AC 110 V, 120 A
Output Voltage	0.01 V ~ 6 V
Output Current	10 A ~ 3,000 A
Output Current Accuracy	-10% ~ 0
Output Waveform	Sine wave
Output Frequency	50 Hz / 60 Hz
Current Injection Duration	1 ms ~ 9,999 ms / 0.1 ~ 500 circles
Output Impedance	0.001 Ω
Output Phase Angle	0°
Test Interval	1 s ~ 9,999 s
Counter	1 ~ 9,999
Trigger Mode	Manual, automatic


General Parameters

Working Power	AC 110 V/220 V ($\pm 10\%$), 50/60 Hz
Dimension	22U rack, 600 mm*1,250 mm*800 mm
Weight	Approx. 273 kg
Atmospheric Pressure	86 kPa ~ 106 kPa
Ambient Temperature	15°C ~ 35°C
Relative Humidity	25% ~ 75%

Standard Accessories

Main Unit, Power Cord, Test Cables, Flat Grounding Wire, Fuse, User Manual

Naming Rules

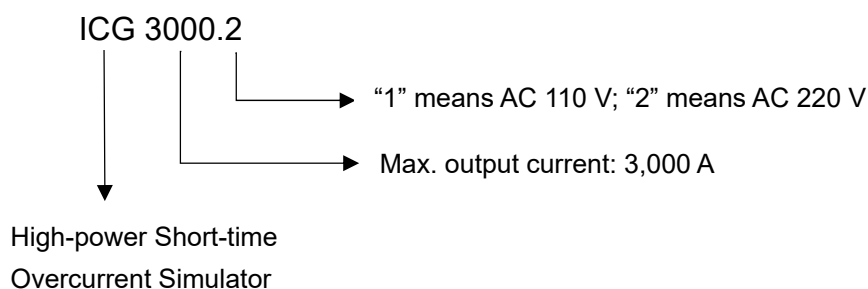

SUZHOU 3CTEST ELECTRONIC CO., LTD.

Address: No. 99 E'meishan Road, SND, Suzhou, Jiangsu Province, China

E-mail: globalsales@3ctest.cn

Service: service@3ctest.cn

Tel: +86 - 512 - 68077192

Web: www.3ctest.com



3CTEST is always striving for product innovation and quality improvement. Product appearance and technical specifications are subject to change without further notice.