



Broadband Current Monitor Clamp

CM 0302M

— Features —

- > Undistorted waveform, physical isolation from current-carrying conductors
- > Supports AC and time-domain pulse current measurement from 5 Hz to 2 MHz
- > Supports harmonic signal measurement up to 2 MHz

— Introduction —

The CM 0302M Broadband Current Monitor is designed for measuring alternating currents from 5 Hz to 2 MHz and time-domain pulse currents. It transmits sinusoidal or pulsed signal currents to recording equipment in the form of voltage via electromagnetic coupling, featuring undistorted waveforms and physical isolation from current-carrying conductors. It meets measurement requirements for sinusoidal signals up to 2 MHz and transient pulse signals with rise time less than 175 ns as specified in various standards, and is widely used in EMC conducted susceptibility (immunity) tests.


— Application Areas —



Technical Parameters

Sensitivity	0.001 V/A
Output Impedance	50 Ω
Max. Peak Current	200,000 A
Max. Continuous Current	520 A
Rise Time	175 ns
A·s Integral	10 A·s
Lower Limit Frequency (-3 dB)	5 Hz
Upper Limit Frequency (-3 dB)	2 MHz
Thickness	40 mm
Inner Diameter	40 mm
Outer Diameter	116 mm
Interface Type	BNC type
Operation Temperature	0°C ~ 65°C
Weight	Approx. 1 kg

s21 Curve

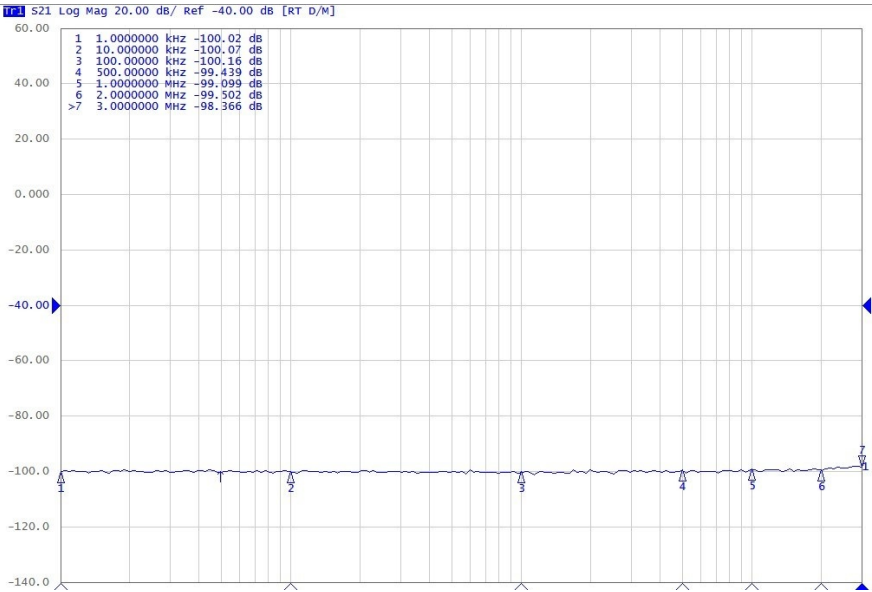

CM 0302M Broadband Current Monitor s21 curve

SUZHOU 3CTEST ELECTRONIC CO., LTD.

Address: No. 99 E'meishan Road, SND, Suzhou, Jiangsu Province, China

E-mail: globalsales@3ctest.cn

Service: service@3ctest.cn

Tel: +86 - 512 - 68077192

Web: www.3c-test.com



3CTEST is always striving for product innovation and quality improvement. Product appearance and technical specifications are subject to change without further notice.