



Wideband Current Transformer

WCT 20

IEC 61000-4-19

Introduction


The WCT 20 Wideband Current Transformer applies to IEC 61000-4-19 differential-mode conducted immunity tests.

It electrically isolates the differential-mode signal generator from the EUT and guarantees test safety.

Technical Parameters

Frequency	2 kHz ~ 150 kHz
Max. Current	5 A
Max. Voltage	<22 V
Impedance	1 Ω ± 0.3 Ω
Interface	4 mm banana plug
Dimension	200 mm(L)*150 mm(W)*53 mm(H)
Weight	2.5 kg
Ambient Temperature	5 °C ~ 40 °C
Relative Humidity	< 80%
Atmospheric Pressure	86 kPa ~ 106 kPa

Equipment Schematic

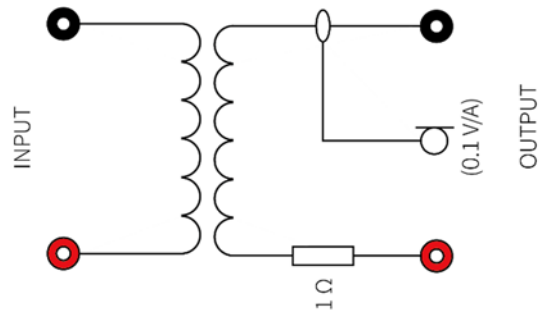

SUZHOU 3CTEST ELECTRONIC CO., LTD.

Address: No. 99 E'meishan Road, SND, Suzhou, Jiangsu Province, China

E-mail: globalsales@3ctest.cn

Service: service@3ctest.cn

Tel: +86 - 512 - 68077192

Web: www.3ctest.com



3CTEST is always striving for product innovation and quality improvement. Product appearance and technical specifications are subject to change without further notice.