



Wideband Current Monitor Calibration Fixture

WCMCF 200

— Features

- > Characteristic Impedance: 50 Ω ;
- > Frequency Range: DC~ 200 MHz;

— Introduction

The WCMCF 200 wideband current monitor calibration fixture is designed with 50 Ω TEM waveguide structure. It is used for calibrating broadband current monitor clamps within the frequency range from 1 Hz to 200 MHz. Featuring low insertion loss and low VSWR, it enables accurate calibration of various broadband current measuring devices across the full bandwidth.


— Application Areas



Technical Parameters

Frequency Renge	DC ~ 200 MHz
Characteristic Impedance	50 Ω
Voltage Standing Wave Ratio	≤ 3
Inner diameter	40 mm
Internal dimensions	60 mm (W)×180 mm (H)×160 mm (D)
Connector type	N type
Operating temperature	0°C ~ 65°C
Weight	Approx. 2 kg

VSWR Curve

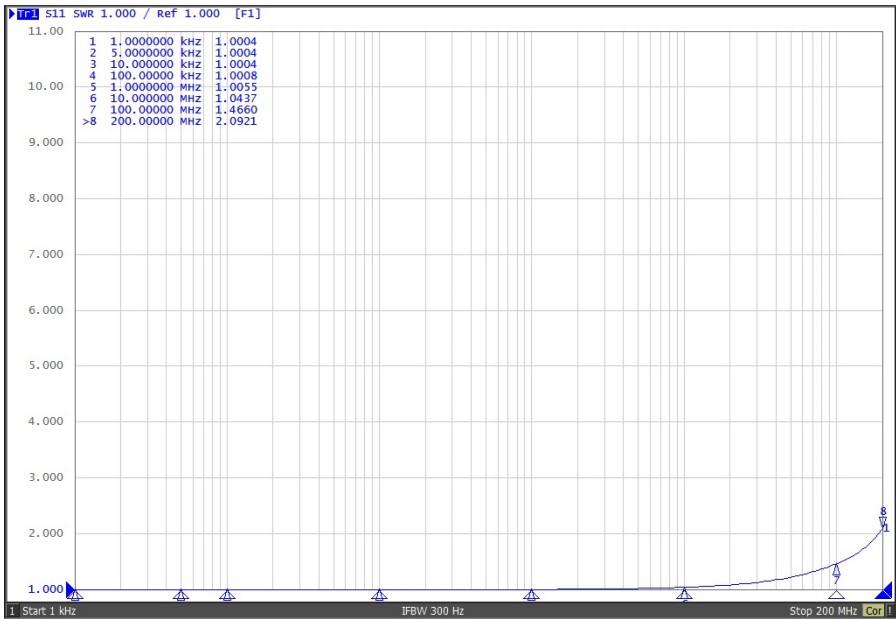

WCMCF 200 – Voltage Standing Wave Ratio (VSWR) Curve

SUZHOU 3CTEST ELECTRONIC CO., LTD.

Address: No. 99 E'meishan Road, SND, Suzhou, Jiangsu Province, China
E-mail: globalsales@3ctest.cn
Service: service@3ctest.cn
Tel: +86 - 512 - 68077192
Web: www.3c-test.com



3CTEST is always striving for product innovation and quality improvement. Product appearance and technical specifications are subject to change without further notice.