



Current Monitor Clamp

T-52

- MIL-STD-461
- RTCA DO-160
- GJB151C

Features

- > Supports high-frequency AC current measurement under low-frequency and DC bias
- > Flat frequency response and low transfer impedance variation ensure a high SNR for low-frequency measurements
- > Undistorted waveform, galvanic isolation from the conductor under test

Introduction

The T-52 Current Monitor Clamp complies with MIL-STD-461H, RTCA DO-160G and GJB151C-2024, and is designed for measuring high-frequency AC current and time-domain pulse current under low-frequency and DC bias. It transfers AC or pulse signal currents to recording equipment as voltage signals via electromagnetic coupling.

Featuring undistorted waveform and galvanic isolation from the conductor under test, it meets measurement requirements for AC injection signals up to 400 MHz and transient pulse signals with rise time exceeding 1 ns. It is widely used in conducted electromagnetic compatibility (EMC) susceptibility (immunity) testing.


Application Areas



Technical Parameters

Frequency Range	2 kHz ~ 400 MHz
Sensitivity/Transfer Impedance	2.5 Ω (8 dBΩ) @50 Ω load
Max. Peak Current	100 A
Max. Cont. Current (RMS)	2 A
EUT Working Current (DC ~ 400 Hz)	200 A
Inner Diameter	40 mm
Outer Diameter	127 mm
Thickness	40 mm
Connector Type	Type N
Temperature	0°C ~ 65°C
Weight	Approx. 2 kg

S21 Curve

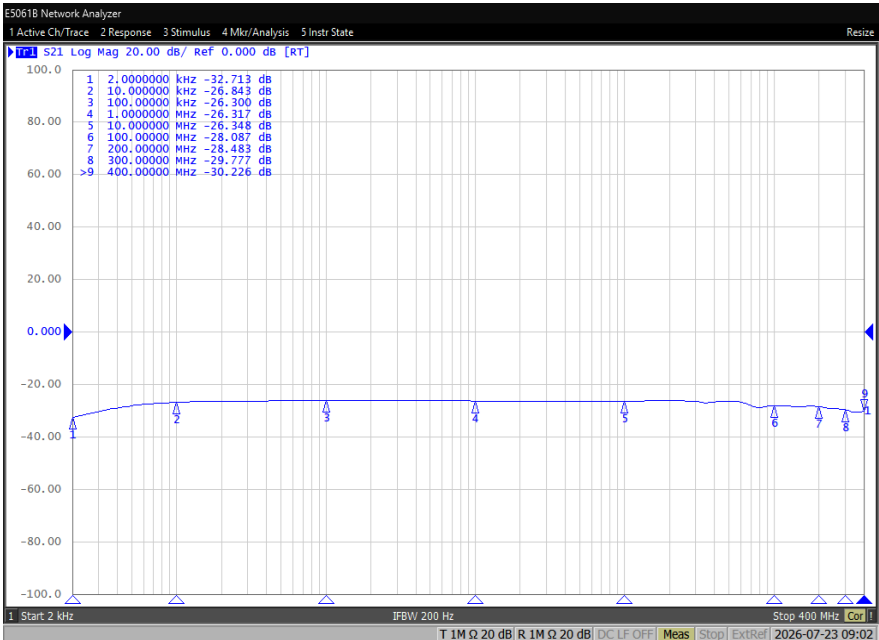

Note: Transfer impedance (dBΩ)= S21+34 dBΩ @50 Ω load

SUZHOU 3CTEST ELECTRONIC CO., LTD.

Address: No. 99 E'meishan Road, SND, Suzhou, Jiangsu Province, China
E-mail: globalsales@3ctest.cn
Service: service@3ctest.cn
Tel: +86 - 512 - 68077192
Web: www.3ctest.com



3CTEST is always striving for product innovation and quality improvement. Product appearance and technical specifications are subject to change without further notice.